


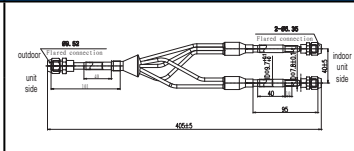

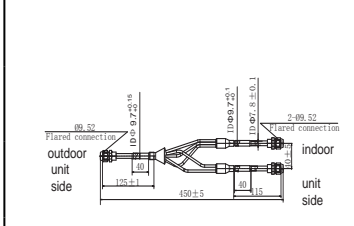

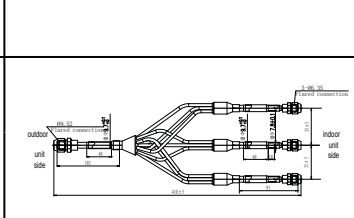


3. Maxi split and function

What is Maxi: The maxi split is that outdoor unit connect with 2/3/4 same model indoor units to realize comfortable air flow with all indoor units turning on or off all in the same time.

3.1 Match table

Outdoor model	AB12CS1ERA(S) AB12CS2ERA(S)	AB18CS1ERA(S) AB18CS2ERA(S)	AB24ES1ERA(S)	AB28ES1ERA(S)
1U36HS1ERA(S)	3	2	/	/
1U48LS1ERA(S)	4	3	2	/
1U48LS1ERB(S)	4	3	2	/
1U48IS1ERB(S)	4	3	2	/
1U60IS1ERB(S)	4	3	/	2
1U60IS2ERB(S)	4	3	2	/
Outdoor model	AC12CS1ERA(S)	AC18CS1ERA(S)	AC24ES1ERA(S)	AC28ES1ERA(S)
1U36HS1ERA(S)	3	2	/	/
1U48LS1ERA(S)	4	3	2	/
1U48LS1ERB(S)	4	3	2	/
1U48IS1ERB(S)	4	3	2	/
1U60IS1ERB(S)	4	3	/	2
1U60IS2ERB(S)	4	3	2	/

3.2 Branch pipe table

The matching table of MAXI SPLIT Series					
Outdoor unit Model	Indoor Unit Model	Number of indoor Units	Gas pipe	Liquid pipe	Branch pipe Model
1U36HS1ERA(S)	AB18CS1ERA(S) AB18CS2ERA(S)	2			FQG-2Y100A
	AC18CS1ERA(S)	2			
1U48LS1ERA(S) 1U48LS1ERB(S) 1U48IS1ERB(S) 1U60IS2ERB(S)	AB24ES1ERA(S)	2			FQG-2Y200A
	AC24CS1ERA(S)	2			
1U60IS1ERB(S)	AB28ES1ERA(S)	2			FQG-2Y200A
	AC28ES1ERA(S)	2			
1U36HS1ERA(S)	AB12CS1ERA(S) AB12CS2ERA(S)	3			FQG-3Y100A
	AC12CS1ERA(S)	3			

The matching table of MAXI SPLIT Series					
Outdoor unit Model	Indoor Unit Model	Number of indoor Units	Gas pipe	Liquid pipe	Branch pipe Model
1U48LS1ERA(S) 1U48LS1ERB(S) 1U48IS1ERB(S) 1U60IS1ERB(S) 1U60IS2ERB(S)	AB18CS1ERA(S)	3			FQG-3Y200A
	AB18CS2ERA(S)				
	AC18CS1ERA(S)	3			
1U48LS1ERA(S) 1U48LS1ERB(S) 1U48IS1ERB(S) 1U60IS1ERB(S) 1U60IS2ERB(S)	AB12CS1ERA(S)	4			FQG-4Y200A
	AB12CS2ERA(S)				
	AC12CS1ERA(S)	4			

Note: For MAXI series models, please choose suitable Branch pipes according to combinations of indoor and outdoor unit ; detailed installation methods and precautions, please refer to the installation instructions of the Branch pipes ; Branch pipes is an optional component; please purchase separately according to the actual installation requirements;

3.3 Feature

- **Easy Pipe Connection**

Maxi split pipe connection takes flared way, not the traditional welding way, easier for installation work.

- **Not need to set address**

Not matter indoor units are 2/3/4 pieces in the system, installer don't need to set address in indoor units, master indoor unit will programmed automaticall. All other indoor units autpmtic become slave insoor units.